




astro

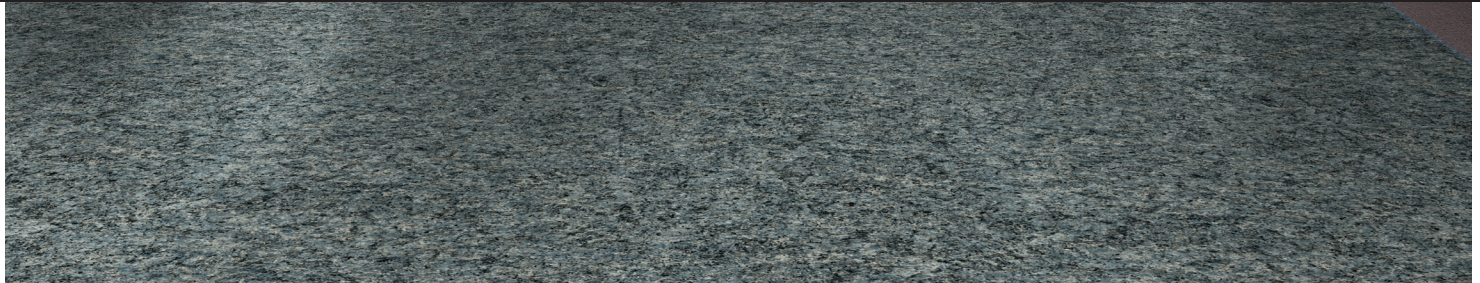

## SPECIFICATIONS

**Construction:** Sheet Vinyl

**Recommended Usage:**

Residential and / or Commercial

**Thickness:** 74 mil

**Wear Layer:** 14 mil

**Wear Layer Treatment:** QuickClean

**Warranty**

15 Yr Limited Residential / 5 Yr Light Commercial

**Made in USA**



Techno  
D028V | 998



Techno  
D028V | 932



Techno  
D028V | 972



Techno  
D028V | 977

## FEATURES & BENEFITS



Waterproof



Seamless



Resilient



High Variation



Stain Resistant



Easy to Clean



Easy to Maintain




Scratch Protection



Approved  
for Any Level

## CONSTRUCTION

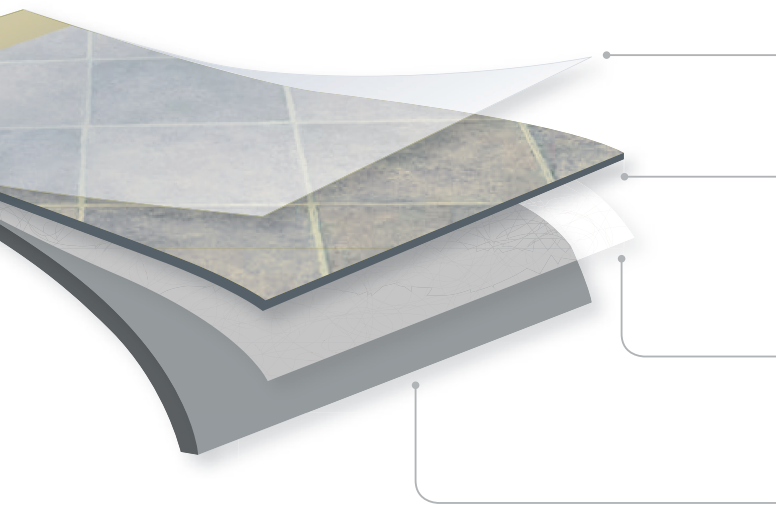

### QuickClean Wear Layer

Easy as 1, 2, 3...

1. Easy to clean - repels dirt and grime so cleaning is a breeze.
2. Easy to maintain - resists cuts, dents, scrapes and scratches.
3. Protection - protects against day-to-day wear for long lasting beauty.

### Design Layer

Where the high-definition designs and colors come to life. A multitude of print cylinders create the most realistic visuals in the market.

### Fiberglass

The fiberglass core is encapsulated by PVC layers, providing strength with flexibility, while ensuring an easy and trouble-free installation process. This inner layer offers your floor unique dimensional stability, which means no cracking, curling, expanding, or contracting.

### ComfortFoil Backing

ComfortFoil is a cushioned backing that provides the ultimate foundation for support and durability. This backing reduces impact noise and sound transmission while guaranteeing unmatched comfort underfoot. It also provides resistance to mold and mildew.

## SEAM SEALER & ADHESIVES

Item	Description	Style
Flex-Prim	Primer/sealer for dusty substrates	IC04
Flex-Seam	Sheet vinyl seam sealer (100LF)	FLXSD
Flex Tech Ultra	1 Gal - 99% RH adhesive (Covers 250-350 SF)	DFTUL
Flex Tech Ultra	4 Gal-99% RH adhesive (Covers 1,000-1,400 SF)	DFTUL

## TESTING INFORMATION

ASTM F1303.....	Type 1, Grade 2
Static Load Limit   ASTM F970.....	750 psi
Smoke Density   ASTM E662.....	<450
COF Slip   ASTM C1028.....	0.64
Residual Indentation   ASTM F1914.....	0.002
Flexibility   ASTM F137.....	Passes (6 mm)
Flooring Radiant Panel   ASTM E648.....	Class 1
Dimensional Stability with Heat   ASTM F2199.....	0.10%
Resistance to Heat   ASTM F1514.....	Passes
Resistance to Light   ASTM F1515.....	Passes
Resistance to Chemicals   ASTM F925.....	Passes