



champion

SPECIFICATIONS

Construction: Sheet Vinyl

Recommended Usage:
Commercial

Thickness: 80 mil

Wear Layer: 20 mil

Wear Layer Treatment: SuperGuard

Warranty

10 Yr Limited Commercial

Made in USA



Vanderbilt
D370V | L35A




Vanderbilt
D370V | L93A



Majestic Oak
D370V | 733A



Majestic Oak
D370V | 792A



Raeburn
D370V | 591A



Noblesse
D370V | 753A



Previa
D370V | 508A



Previa
D370V | 544



Brentwood
D370V | 592C



Vintage Oak
D370V | 748B



Toronto
D370V | 537A

FEATURES & BENEFITS



Waterproof



Seamless



Resilient



High Variation



Stain Resistant



Easy to Clean



Easy to Maintain




Scratch Protection



Approved
for Any Level

CONSTRUCTION

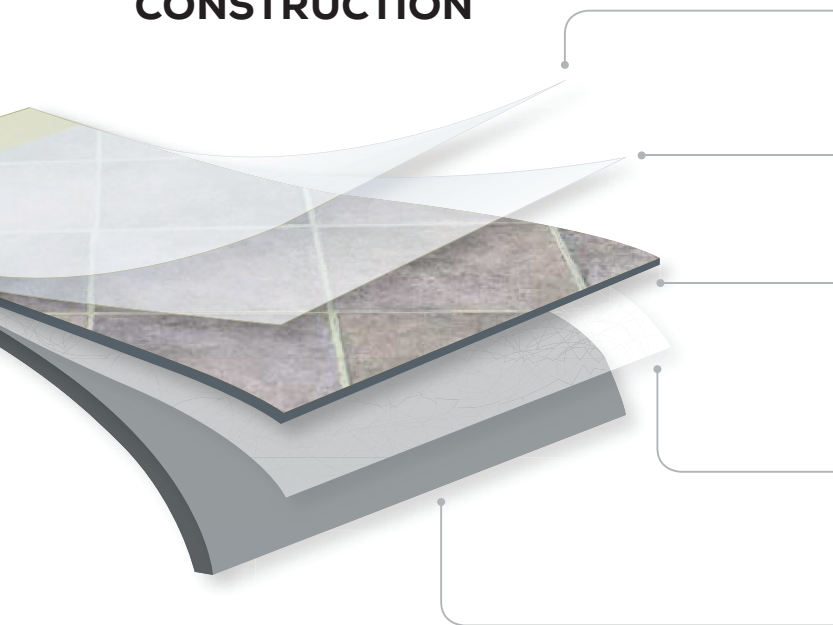

SuperGuard Stain Shield

Provides protection against your toughest stains. Scuff- and scratch-resistant, it's built to repel just about anything - making cleaning a snap.

QuickClean Wear Layer

Easy as 1, 2, 3...

1. Easy to clean - repels dirt and grime so cleaning is a breeze.
2. Easy to maintain - resists cuts, dents, scrapes and scratches.
3. Protection - protects against day-to-day wear for long lasting beauty.

Design Layer

Where the high-definition designs and colors come to life. A multitude of print cylinders create the most realistic visuals in the market.

Fiberglass

The fiberglass core is encapsulated by PVC layers, providing strength with flexibility, while ensuring an easy and trouble-free installation process. This inner layer offers your floor unique dimensional stability, which means no cracking, curling, expanding, or contracting.

ComfortFoil Backing

ComfortFoil is a cushioned backing that provides the ultimate foundation for support and durability. This backing reduces impact noise and sound transmission while guaranteeing unmatched comfort underfoot. It also provides resistance to mold and mildew.

SEAM SEALER & ADHESIVES

Item	Description	Style
Flex-Prim	Primer/sealer for dusty substrates	IC04
Flex-Seam	Sheet vinyl seam sealer (100LF)	FLXSD
Flex Tech Ultra	1 Gal- 99% RH adhesive (Covers 250-350 SF)	DFTUL
Flex Tech Ultra	4 Gal-99% RH adhesive (Covers 1,000-1,400 SF)	DFTUL

TESTING INFORMATION

ASTM F1303.....	Type 1, Grade 2
Static Load Limit ASTM F970.....	750 psi
Smoke Density ASTM E662.....	<450
COF Slip ASTM C1028.....	0.64
Residual Indentation ASTM F1914.....	0.002
Flexibility ASTM F137.....	Passes (6 mm)
Flooring Radiant Panel ASTM E648.....	Class 1
Dimensional Stability with Heat ASTM F2199.....	0.10%
Resistance to Heat ASTM F1514.....	Passes
Resistance to Light ASTM F1515.....	Passes
Resistance to Chemicals ASTM F925.....	Passes