



essential



SPECIFICATIONS

Construction: Sheet Vinyl

Recommended Usage:
Residential

Thickness: 75 mil

Wear Layer: 10 mil

Wear Layer Treatment: SuperGuard

Warranty
10 Yr Limited Residential


Made in USA



Folley
D004V | 997



Baron
D004V | 714

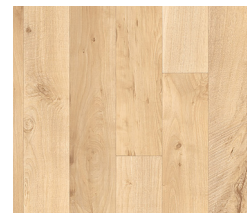


Baron
D004V | 754



Windsor
D004V | 931



Wales
D004V | 840A

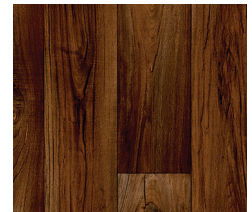

Wales
D004V | 848



Rocky
D004V | 592A



Manchester
D004V | 994



Manchester
D004V | 933A



Hampton
D004V | 546



Nero
D004V | 546A



Nero
D004V | 537

FEATURES & BENEFITS



Waterproof



Seamless



Resilient



High Variation



Stain Resistant



Easy to Clean




Easy to Maintain




Scratch Protection




Approved
for Any Level



Laredo
D004V | 846




Laredo
D004V | 847A



Boone
D004V | 840

CONSTRUCTION

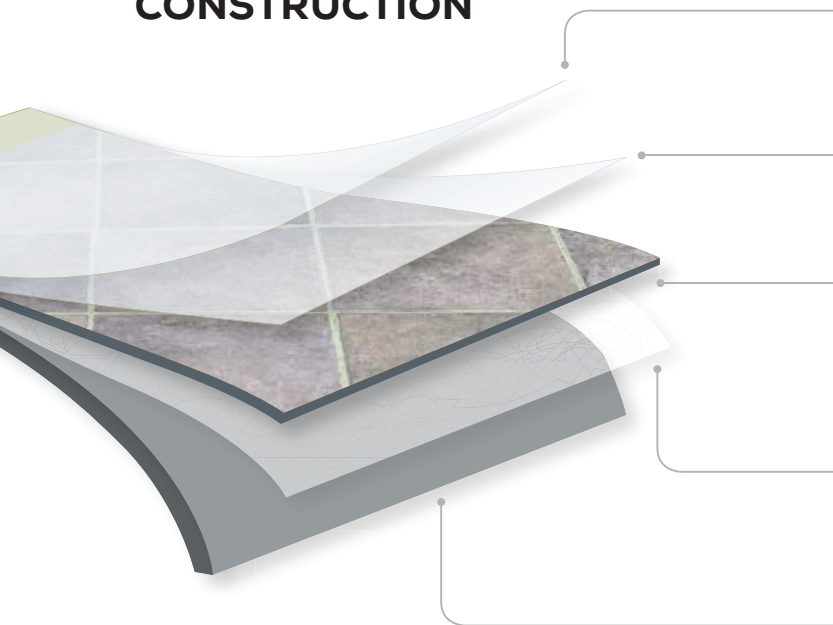

SuperGuard Stain Shield

Provides protection against your toughest stains. Scuff- and scratch-resistant, it's built to repel just about anything - making cleaning a snap.

QuickClean Wear Layer

Easy as 1, 2, 3...

1. Easy to clean - repels dirt and grime so cleaning is a breeze.
2. Easy to maintain - resists cuts, dents, scrapes and scratches.
3. Protection - protects against day-to-day wear for long lasting beauty.

Design Layer

Where the high-definition designs and colors come to life. A multitude of print cylinders create the most realistic visuals in the market.

Fiberglass

The fiberglass core is encapsulated by PVC layers, providing strength with flexibility, while ensuring an easy and trouble-free installation process. This inner layer offers your floor unique dimensional stability, which means no cracking, curling, expanding, or contracting.

ComfortFoam Backing

ComfortFoam is a cushioned backing that provides the ultimate foundation for support and durability. This backing reduces impact noise and sound transmission while guaranteeing unmatched comfort underfoot. It also provides resistance to mold and mildew.

SEAM SEALER & ADHESIVES

Item	Description	Style
Flex-Prim	Primer/sealer for dusty substrates	IC04
Flex-Seam	Sheet vinyl seam sealer (100LF)	FLXSD
Flex Tech Ultra	1 Gal - 99% RH adhesive (Covers 250-350 SF)	DFTUL
Flex Tech Ultra	4 Gal-99% RH adhesive (Covers 1,000-1,400 SF)	DFTUL

TESTING INFORMATION

ASTM F1303.....	Type 1, Grade 2
Static Load Limit ASTM F970.....	750 psi
Smoke Density ASTM E662.....	<450
COF Slip ASTM C1028.....	0.64
Residual Indentation ASTM F1914.....	0.002
Flexibility ASTM F137.....	Passes (6 mm)
Flooring Radiant Panel ASTM E648.....	Class 1
Dimensional Stability with Heat ASTM F2199.....	0.10%
Resistance to Heat ASTM F1514.....	Passes
Resistance to Light ASTM F1515.....	Passes
Resistance to Chemicals ASTM F925.....	Passes