



planet



SPECIFICATIONS

Construction: Sheet Vinyl

Recommended Usage:

Residential and / or Commercial

Thickness: 86 mil

Wear Layer: 16 mil

Wear Layer Treatment: SuperGuard

Warranty

20 Yr Limited Residential / 10 Yr Light Commercial


Made in USA



Modus
D360V | 589



Modus
D360V | 585



Modus
D360V | 536



Modus
D360V | 509



Marble
D360V | 698




Marble
D360V | 695



Marble
D360V | 631



Marble
D360V | 637



Marble
D360V | 672

FEATURES & BENEFITS



Waterproof



Seamless



Resilient



High Variation



Stain Resistant



Easy to Clean



Easy to Maintain




Scratch Protection



Approved
for Any Level

CONSTRUCTION

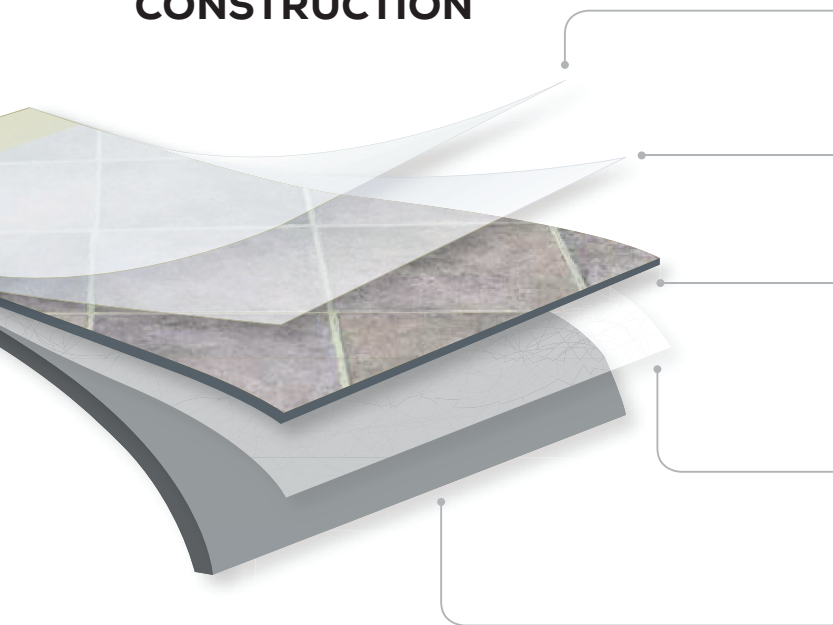

SuperGuard Stain Shield

Provides protection against your toughest stains. Scuff- and scratch-resistant, it's built to repel just about anything - making cleaning a snap.

QuickClean Wear Layer

Easy as 1, 2, 3...

1. Easy to clean - repels dirt and grime so cleaning is a breeze.
2. Easy to maintain - resists cuts, dents, scrapes and scratches.
3. Protection - protects against day-to-day wear for long lasting beauty.

Design Layer

Where the high-definition designs and colors come to life. A multitude of print cylinders create the most realistic visuals in the market.

Fiberglass

The fiberglass core is encapsulated by PVC layers, providing strength with flexibility, while ensuring an easy and trouble-free installation process. This inner layer offers your floor unique dimensional stability, which means no cracking, curling, expanding, or contracting.

ComfortFoam Backing

ComfortFoam is a cushioned backing that provides the ultimate foundation for support and durability. This backing reduces impact noise and sound transmission while guaranteeing unmatched comfort underfoot. It also provides resistance to mold and mildew.

SEAM SEALER & ADHESIVES

Item	Description	Style
Flex-Prim	Primer/sealer for dusty substrates	IC04
Flex-Seam	Sheet vinyl seam sealer (100LF)	FLXSD
Flex Tech Ultra	1 Gal - 99% RH adhesive (Covers 250-350 SF)	DFTUL
Flex Tech Ultra	4 Gal-99% RH adhesive (Covers 1,000-1,400 SF)	DFTUL

TESTING INFORMATION

ASTM F1303.....	Type 1, Grade 2
Static Load Limit ASTM F970.....	750 psi
Smoke Density ASTM E662.....	<450
COF Slip ASTM C1028.....	0.64
Residual Indentation ASTM F1914.....	0.002
Flexibility ASTM F137.....	Passes (6 mm)
Flooring Radiant Panel ASTM E648.....	Class 1
Dimensional Stability with Heat ASTM F2199.....	0.10%
Resistance to Heat ASTM F1514.....	Passes
Resistance to Light ASTM F1515.....	Passes
Resistance to Chemicals ASTM F925.....	Passes