



crawford



SPECIFICATIONS

Construction: Flexible LVT

Recommended Usage:

Residential and / or Commercial

Thickness: 2 mm

Plank Size: 6" x 36"

Pieces per Carton: 24

Wear Layer: 10 mil

Wear Layer Treatment: UltraGuard

Warranty

15 Yr Limited Residential / 6 Yr Light Commercial

Made in USA




Ashen Smoked

D539V | AP896



Brown Abode

D539V | AP846



Dusk Desire

D539V | AP848



Tawny Straw

D539V | AP835



Ember Sun

D539V | AU867



Steely Sky

D539V | AU896



Sterling Shimmer

D539V | AU892



Golden Blends

D539V | AU852

FEATURES & BENEFITS



Waterproof



Resilient



High Variation



Stain Resistant



Easy to Clean



Easy to Maintain




Scratch Protection



Approved
for Any Level

CONSTRUCTION

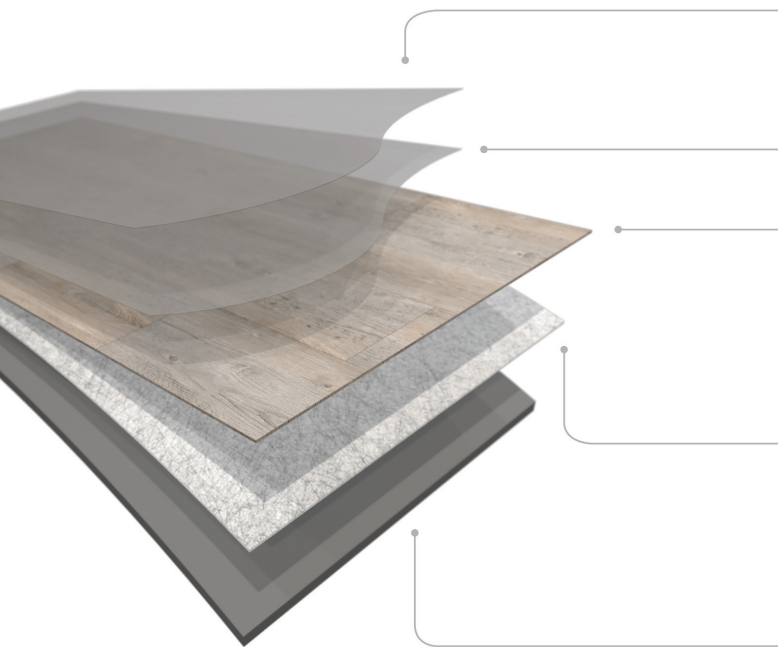

UltraGuard Stain Shield

UltraGuard provides superior protection from the toughest stains, spills, scuffs, and scratches - including those from pets.

QuickClean Wear Layer

Easy as 1, 2, 3...

1. Easy to clean - repels dirt and grime so cleaning is a breeze.
2. Easy to maintain - resists cuts, dents, scrapes and scratches.
3. Protection - protects against day-to-day wear for long lasting beauty.

High-Definition Print Layer

Where the high-definition designs and colors come to life.

A multitude of print cylinders create the most realistic visuals in the market.

Reinforcing Fiberglass

The fiberglass core is encapsulated by PVC layers, providing strength with flexibility, while ensuring an easy and trouble-free installation process. This inner layer offers your floor unique dimensional stability, which means no cracking, curling, expanding, or contracting.

Super Compact Backing

The backing's high density provides unparalleled dimensional stability, durability, and added protection against indentation. This backing reduces impact noise and sound transmission while guaranteeing unmatched comfort underfoot. It also provides resistance to mold and mildew.

SEAM SEALER & ADHESIVES

Item	Description	Style
Flex-Prim	Primer/sealer for dusty substrates	IC04
Flex-Seam	Sheet vinyl seam sealer (100LF)	FLXSD
Flex Tech Ultra	1 Gal- 99% RH adhesive (Covers 250-350 SF)	DFTUL
Flex Tech Ultra	4 Gal-99% RH adhesive (Covers 1,000-1,400 SF)	DFTUL

SOUND TESTING INFORMATION

ASTM E90	ASTM E492	Assembly
STC 51	IIC 44	6" Concrete Slab
STC 56	IIC 45	8" Concrete Slab
STC 59	IIC 59	6" Concrete Slab with Drop-Ceiling
STC 62	IIC 72	8" Concrete Slab with HPPC5

TESTING INFORMATION

ASTM F970.....	Passes
Static Load Limit ASTM F970.....	1,100 psi
Smoke Density ASTM E662.....	Passes
COF Slip ASTM D2047.....	≥ 0.6 (Dry, Wet)
Castor Wheel Test ISO 4918.....	Passes
Flooring Radiant Panel ASTM E648.....	Passes
Dimensional Stability with Heat ASTM F2199.....	Passes
Resistance to Heat ASTM F1514.....	Passes
Resistance to Light ASTM F1515.....	Passes
Resistance to Chemicals ASTM F925.....	Passes