



SPECIFICATIONS

Construction: Sheet Vinyl

Recommended Usage:
Residential

Thickness: 110 mil

Wear Layer: 12 mil

Wear Layer Treatment: SuperGuard


Warranty

15 Yr Limited Residential

Made in USA



Kendall
D195V | 993



Kendall
D195V | 934



Mays
D195V | 999



Mays
D195V | 943



Newnan
D195V | 933



Condor
D195V | 533



Waverly
D195V | 906



Chivalry
D195V | 581




Soprano
D195V | 995



Aspin
D195V | 843



Equador
D195V | 745



Marseille
D195V | 851

FEATURES & BENEFITS



Waterproof



Seamless



Resilient



High Variation



Stain Resistant



Easy to Clean



Easy to Maintain



Scratch Protection



Approved
for Any Level



Eaglewood
D195V | 534




Dulcinea
D195V | 590A




Trace
D195V | 790




Trace
D195V | 757




Harper
D195V | 591A



Raleigh
D195V | 837



Bertram
D195V | 596



Bertram
D195V | 594



Argentina
D195V | 818



Argentina
D195V | 837A



Lorraine
D195V | 594A




Lorraine
D195V | 532C



Odessa
D195V | 846

CONSTRUCTION

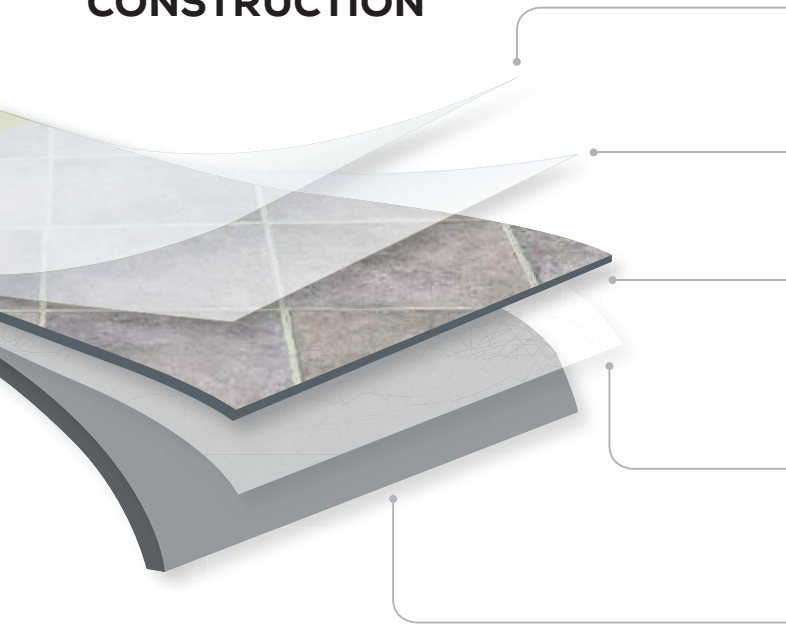

SuperGuard Stain Shield

Provides protection against your toughest stains. Scuff and scratch resistant, it's built to repel just about anything - making cleaning a snap.

Quick Clean Wear Layer

Easy as 1, 2, 3...

1. Easy to clean - repels dirt and grime so cleaning is a breeze.
2. Easy to maintain - resists cuts, dents, scrapes and scratches.
3. Protection - protects against day-to-day wear for long lasting beauty.

Design Layer

Where the high-definition designs and colors come to life. A multitude of print cylinders create the most realistic visuals in the market

Fiberglass

The fiberglass core is encapsulated by PVC layers, providing strength with flexibility while ensuring an easy and trouble-free installation process. This inner layer offers your floor unique dimensional stability, which means no cracking, curling, expanding or contracting

ComfortFoam Backing

Comfort Foam is a cushioned backing that provides the ultimate foundation for support and durability. This backing reduces impact noise and sound transmission while guaranteeing unmatched comfort underfoot. It also provides resistance to mold and mildew.

SEAM SEALER & ADHESIVES

Item	Description	Style
Flex-Prim	Primer/sealer for dusty substrates	IC04
Flex-Seam	Sheet vinyl seam sealer (100LF)	FLXSD
Flex Tech Ultra	1 Gal- 99% RH adhesive (Covers 250-350 SF)	DFTUL
Flex Tech Ultra	4 Gal-99% RH adhesive (Covers 1,000-1,400 SF)	DFTUL

TESTING INFORMATION

ASTM F1303.....	Type 1, Grade 2
Static Load Limit ASTM F970.....	750 psi
Smoke Density ASTM E662.....	<450
COF Slip ASTM C1028.....	0.64
Residual Indentation ASTM F1914.....	0.002
Flexibility ASTM F137.....	Passes (6 mm)
Flooring Radiant Panel ASTM E648.....	Class 1
Dimensional Stability with Heat ASTM F2199.....	0.10%
Resistance to Heat ASTM F1514.....	Passes
Resistance to Light ASTM F1515.....	Passes
Resistance to Chemicals ASTM F925.....	Passes