canyon collection

Seamless Flooring Roll Program

RESILIENT **DESIGN**

Designs

Compton | 748A
13'2": 65172.748A.1302.V
12': 65172.748A.1200.V

Aspin | 838
13'2": 65172.838.1302.V
12': 65172.838.1200.V

Aspin | 890
13'2": 65172.890.1302.V

Grist | 592
13'2": 65172.592.1302.V

Condor | 939
13'2": 65172.939.1302.V
12': 65172.939.1200.V

Davinci | 934A
13'2": 65172.934A.1302.V

Parador | 978
13'2": 65172.978.1302.V
12': 65172.978.1200.V

Spotted Gum | 746
13'2": 65172.746.1302.V

canyon collection

Seamless Flooring Roll Program

RESILIENT **DESIGN**

Designs

Seneca Slate | 993
13'2": 65172.993.1302.V
12': 65172.993.1200.V

Santa Fe | 503
13'2": 65172.503.1302.V

Torrence | 594
13'2": 65172.594.1302.V
12': 65172.594.1200.V

Specifications

Construction	Recommended Usage	Thickness	Wear Layer	Wear Layer Treatment	Finish	Width	Standard Length	Average Weight of Standard Roll	Warranty
Sheet Vinyl	Residential	105 Gauge	10 mil	SuperGuard	Mechanically Embossed	13' 2"/ 12' Limited SKUs	100 lineal ft/ 100 lineal ft	435 lbs / 396 lbs	5-Year Residential*

* See written limited warranty for full details.

Multi-Layer Construction

Built to perform

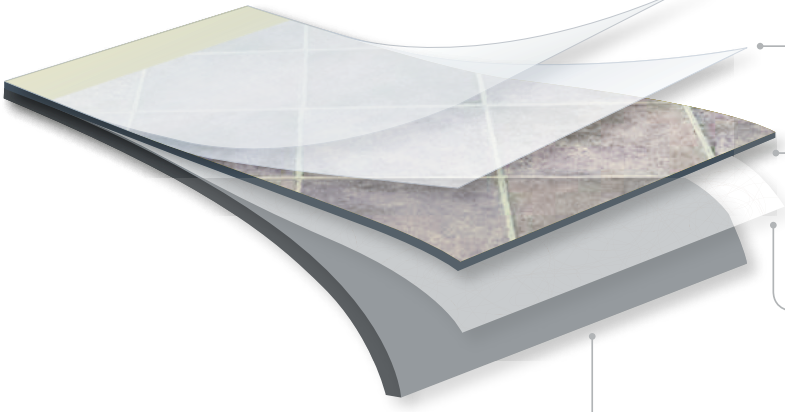

SuperGuard Stain Shield
Provides protection against your toughest stains. Scuff and scratch resistant, it's built to repel just about anything - making cleaning a snap.

QuickClean Wear Layer
Easy as 1, 2, 3...
1. Easy to clean - repels dirt and grime so cleaining is a breeze.
2. Easy to maintain - resists cuts, dents, scrapes and scratches.
3. Protection - protects against day-today wear for long lasting beauty.

Design Layer
Where the high-definition designs and colors come to life. A multitude of print cylinders create the most realistic visuals in the market.

Fiberglass
The fiberglass core is encapsulated by PVC layers, providing strength with flexibility while ensuring an easy and trouble-free installation process. This inner layer offers your floor unique dimensional stability, which means no cracking, curling, expanding or contracting.

Comfort Foam Backing
Comfort Foam is a cushioned backing that provides the ultimate foundation for support and durability. This backing reduces impact noise and sound transmission while guaranteeing unmatched comfort underfoot. It also provides resistance to mold and mildew.

canyon collection

Seamless Flooring Roll Program

RESILIENT **DESIGN**

Testing Information

Residual Indentation | ASTM F1914	0.012
Flexibility | ASTM F137	Passes (10 mm)
Resistance to Heat | ASTM F1514	Passes
Resistance to Light | ASTM F1515	Passes
Resistance to Chemicals | ASTM F925	Passes
IIC Sound Transmission	IIC 54

Made in the USA

Adhesives

- **Flex Tech PSA for Sheet Vinyl**

  1 Gallon 706471 | **4 Gallon** 706472 | **1 Quart** 706473

  Coverage 350 sq ft/gallon - porous | 400 sq ft/gallon - non porous

  Pressure sensitive adhesive | Clear set | Solvent free

- **Flex Seam Bond**

  8 oz. 706474

  Solvent free | Low VOC | High strength | Fast drying | Dries clear

- **Flex Prim Acrylic Latex Primer**

  1 Gallon 706475

  Coverage Up to 500 sq ft/gallon

  Use as primer coat | Increases adhesive performance | Increases adhesive coverage

- **iGrip Adhesive VINYL**

  1 Gallon 706620 | **4 Gallon** 706621

  Coverage 350 sq ft/gallon - porous | 400 sq ft/gallon - non porous

  Permanent adhesive | Commercial wet set adhesive | Combats mold/mildew growth | Greenguard certified | low VOCs