

goliath collection

Seamless Flooring Roll Program



RESILIENT DESIGN



Designs



Luizsa | 533
13'2": 65128.533.1302.V



Washington | 932C
13'2": 65128.932C.1302.V



Dolomite | 933
13'2": 65128.933.1302.V



Riviera | 932A
13'2": 65128.932A.1302.V



Titus | 935
13'2": 65128.935.1302.V



Titus | 997A
13'2": 65128.997A.1302.V



Toucan | 936
13'2": 65128.936.1302.V
12": 65128.936.1200.V



Toucan | 933B
13'2": 65128.933B.1302.V

Product Information

goliath collection

Seamless Flooring Roll Program



RESILIENT DESIGN

Designs




Vintage Oak | 542
13'2": 65128.542.1302.V
12": 65128.542.1200.V




Kenosha | 739
13'2": 65128.739.1302.V



Ashland | 595
13'2": 65128.595.1302.V



Anson | 599
13'2": 65128.599.1302.V



Kenseth | 595
13'2": 65128.595.1302.V



Valencia | 744
13'2": 65128.744.1302.V
12": 65128.744.1200.V

goliath collection

Seamless Flooring Roll Program




RESILIENT DESIGN

Specifications

Construction	Recommended Usage	Thickness	Wear Layer	Wear Layer Treatment	Finish	Width	Standard Length	Average Weight of Standard Roll	Warranty
Sheet Vinyl	Residential	125 Gauge	12 mil	SuperGuard	Mechanically Embossed	13' 2" / 12' Limited SKUs	85 lineal ft / 85 lineal ft	544 lbs / 496 lbs	10-Year Residential*

* See written limited warranty for full details.

Multi-Layer Construction Built to perform

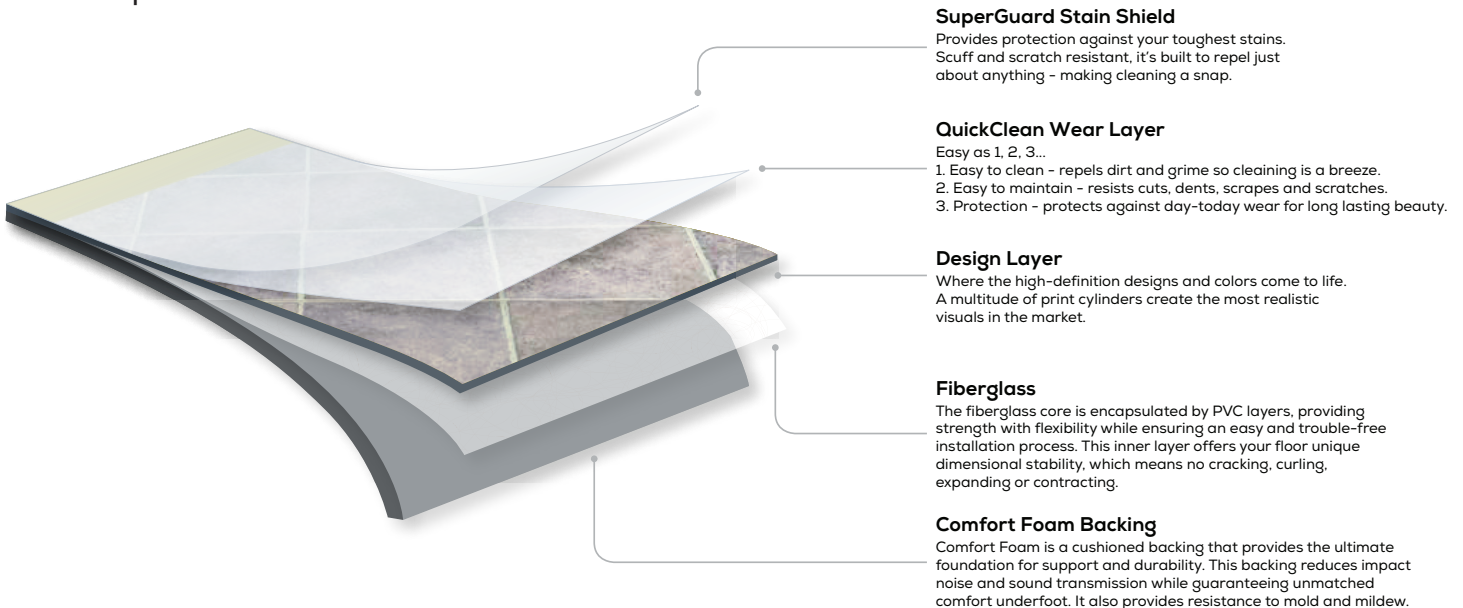

Testing Information

Residual Indentation ASTM F1914.....	0.006
Flexibility ASTM F137.....	Passes (10 mm)
Resistance to Heat ASTM F1514.....	Passes
Resistance to Light ASTM F1515.....	Passes
Resistance to Chemicals ASTM F925.....	Passes
IIC Sound Transmission.....	IIC 54



Made in the USA



CERTIFIED BY
SCS Global Services



Adhesives

- **Flex Tech PSA for Sheet Vinyl**

1 Gallon 706471 | **4 Gallon** 706472 | **1 Quart** 706473

Coverage 350 sq ft/gallon - porous | 400 sq ft/gallon - non porous

Pressure sensitive adhesive | Clear set | Solvent free

- **Flex Seam Bond**

8 oz. 706474

Solvent free | Low VOC | High strength | Fast drying | Dries clear

- **Flex Prim Acrylic Latex Primer**

1 Gallon 706475

Coverage Up to 500 sq ft/gallon

Use as primer coat | Increases adhesive performance | Increases adhesive coverage

- **iGrip Adhesive VINYL**

1 Gallon 706620 | **4 Gallon** 706621

Coverage 350 sq ft/gallon - porous | 400 sq ft/gallon - non porous

Permanent adhesive | Commercial wet set adhesive | Combats mold/mildew growth | Greenguard certified | low VOCs