


TEXMARK



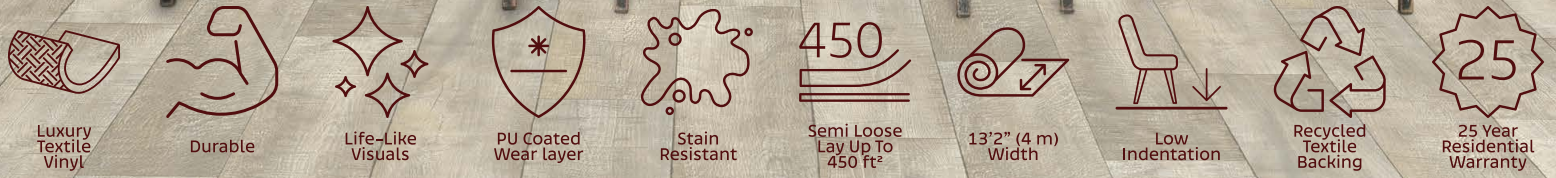

Technical Information

SPECIFICATIONS

Flooring type		Luxury Textile Vinyl
Type of installation		Loose lay ¹ Glue down
Total thickness	EN ISO 24346	2.80 mm
Wear layer	EN ISO 24340	16mil (0.40mm)
Wear layer treatment		PU lacquer
Width	EN ISO 24341	13'2" (4 m)
Standard length	EN ISO 24341	98'5" (30 m)
Standard roll size		1,291 ft ² (120 m ²)
Weight	EN ISO 23997	0.40 lbs/ft ² (1.95 kg/m ²)
Weight of standard roll		516 lbs (234 kg)
Residential warranty ²		25 years

PERFORMANCE

Usage class	EN ISO 10874	23 - 32
Inflammability	EN 13501-1	Cfl-S1
Slip resistance	EN 13893	DS
Slip restraint	EN 16165 Annex B	R10
Thermal conductivity	ISO 8302 (1991)	0.0667 W/(m.K)
Heat insulation	EN 12667:2001-01	0.0338 (m ² .K/W)
Acoustic insulation	EN ISO 717-2	ΔLw 17 dB
Underfloor heating	EN 12524/EN 12667	Suitable ≤ 29°C
Resistance to chemicals	EN ISO 26987	Very good
Cold welding	Invisiweld	Suitable

¹Can be semi loose lay installed up to 450 ft².

²The warranty covers manufacturing defects and early wear due to normal residential use.


Composition

Texmark combines a protective poly-urethane (PU) lacquer overlay coating, a durable wear layer with realistic embossing, and high-definition imaging over a stabilized multi-layer core reinforced with fiberglass.

The Luxury Textile backing boosts acoustic performance and walking comfort while enabling loose lay installation. REACH certified to support a healthier home.



- 1 Poly-Urethane Coating**
 - Poly-urethane (PU) overlay coating
 - Enhanced scratch & stain resistance
 - Improved cleanability
 - Built-in anti-microbial properties
- 2 Protection**
 - Durable 16 mil (0.4mm) wear layer
 - Embossed finish for authentic texture and feel
- 3 Imaging**
 - High-definition imaging for true-to-life visuals
- 4 Compact Layer**
 - Smoothing layer supporting the stabilizing structure beneath
 - Provides additional comfort and acoustic performance
- 5 Reinforcement**
 - Fiberglass reinforcement layer
 - Superior dimensional stability
- 6 PVC Backing**
 - Enhances acoustic performance
 - Increased comfort underfoot
- 7 Backing**
 - Heavy Compact backing
 - Extreme durability
 - Resists indentation and supports rolling loads

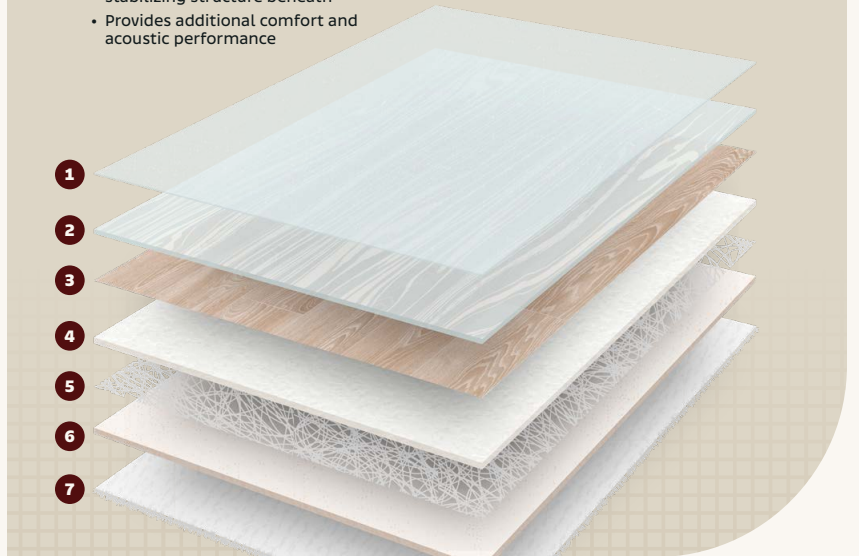



Annapurna - 506 VIN.IVL.TEXM-13LT/ANN506



Annapurna - 594 VIN.IVL.TEXM-13LT/ANN594



Chaparral Oak - 509 VIN.IVL.TEXM-13LT/CHA509



EMBER - 548 VIN.IVL.TEXM-13LT/EMB548



EMBER - 558 VIN.IVL.TEXM-13LT/EMB558



Chaparral Oak - 593 VIN.IVL.TEXM-13LT/CHA593



Forester - 537 VIN.IVL.TEXM-13LT/FOR537



Forester - 595 VIN.IVL.TEXM-13LT/FOR595



Lumber - 561 VIN.IVL.TEXM-13LT/LUM561



Lumber - 587 VIN.IVL.TEXM-13LT/LUM587





Umea - 545 VIN.IVL.TEXM-13LT/UME545




Umea - 556 VIN.IVL.TEXM-13LT/UME556



Umea - 583 VIN.IVL.TEXM-13LT/UME583



Meadow - 547 VIN.IVL.TEXM-13LT/MEA547

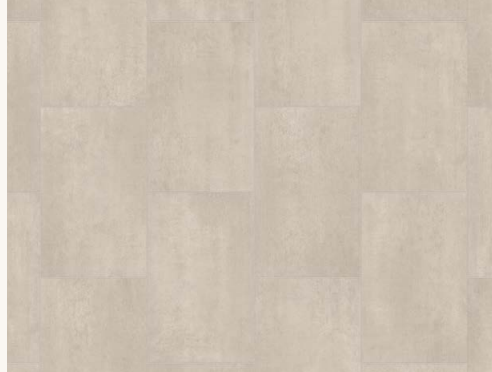

Denia - 582 VIN.IVL.TEXM-13LT/DEN582



Denia - 597 VIN.IVL.TEXM-13LT/DEN597



Modica - 534 VIN.IVL.TEXM-13LT/MOD534



Modica - 593 VIN.IVL.TEXM-13LT/MOD593



Minos - 582 VIN.IVL.TEXM-13LT/MIN582




Minos - 596 VIN.IVL.TEXM-13LT/MIN596





Alvor - T39

VIN.IVL.TEXM-13LT/ALVT39

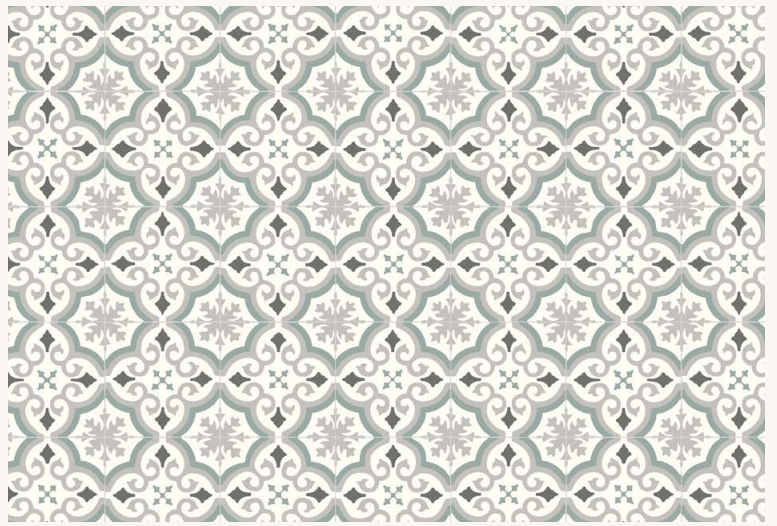


Evora - T26

VIN.IVL.TEXM-13LT/EVOT26



Bari - 531

VIN.IVL.TEXM-13LT/BAR531

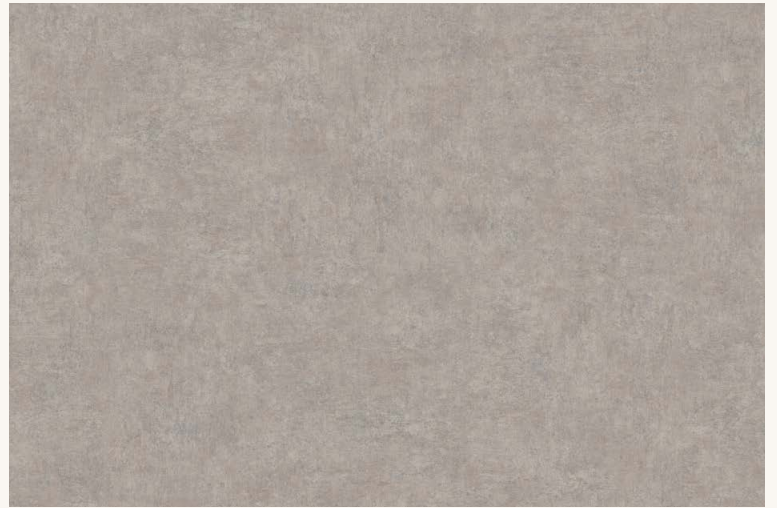

Odin - 582

VIN.IVL.TEXM-13LT/ODI582

