


NEWPORT





LOOSE LAY
LUXURY VINYL



100%
WATER PROOF



DIMENSIONALLY
STABLE



WOOD GRAIN
EMBOSSSED



PU COATED
WEAR LAYER



BEVELED
EDGE



100% VIRGIN
MATERIALS



LOW
MAINTENANCE



EXACT MATCH
MOLDINGS



LIFETIME
WARRANTY

Technical Information

SPECIFICATIONS

Flooring type	Loose Lay Luxury Vinyl
Type of installation	Loose Lay ¹ or Glue Down
Width	9" (228.6mm)
Length	48" (1,219.2mm)
Overall thickness	4.5mm
Wear layer	20mil (0.5mm) PU coated
Edge	Micro Bevel
Finish	Medium wood grain embossed
Residential warranty ²	Exclusive Lifetime
Commercial warranty ²	Exclusive 15 Years

PACKAGING

Box	9 planks	27.00 SQFT	2.508 SQM	45 lbs
Pallet	52 boxes	1,404.00 SQFT	130.436 SQM	2,359 lbs

PERFORMANCE

Usage	EN ISO 10874	23 - 33 - 41
Reaction to fire	ISO 13501-1	Bfl-S1
Thermal conductivity	EN 12667	Pass (≤ 0.15 (m ² ·k)/W)
Anti-slip property	DIN 51130	R10
Squareness	ASTM F 2055	Pass (≤ 0.25)
Overall thickness	ISO 24346 / ASTM F 386	Pass (± 0.15 mm)
Dimensional stability ³	ISO 23999	Pass ($\leq 0.4\%$)
Curling ³	ISO 23999	Pass ($\leq 0.2\%$)
Flexibility	ISO 24344	No Crack
Residual indentation	ISO 24343-1	Pass (≤ 0.1 mm)
Castor chair test	ISO 4918	No damage
Colour fastness to light	ISO 105-B02	Pass (≥ 6)
Resistance to chemicals	EN 423 ASTM F 925	Pass (Class 0) Pass
VOC emission	ISO 16000	Pass (A+)
Phthalates	EN 14372 CPSC-CH-C 1001-09.3	Not detected Not detected
FloorScore ⁴		Certified
GreenGuard		Certified

¹Loose Lay installation is for residential applications only. Unexpected issues from Loose Lay installations such as unwanted movement of the flooring caused by volatile and/or environmental conditions is not covered by the Exclusive Warranty.

²The Exclusive Warranty covers issues related to the wear layer, structural integrity, and manufacturing defects. Installation of visually defective material is not covered by the



Exclusive Warranty. Failure to follow installation guideline may result in a voided Warranty.

³Dimensional stability and curling test is performed after exposure to heat.

⁴FloorScore certified to meet indoor air quality standards, rigorously tested to be free of 35 types of Volatile Organic Compounds including formaldehyde. Qualifies for many green building schemes such as LEED v4, WELL, BREEAM, & CHPS.





Arctic Plank

LUX.SHS.NEP2-0948/ARCPLA
99001110069



Barn Plank

LUX.SHS.NEP2-0948/BARPLA
99001110070



Castle Wood

LUX.SHS.NEP2-0948/CASWOO
99001110071



Charred Timber

LUX.SHS.NEP2-0948/CHARTI
99001110604



Chateau Wood

LUX.SHS.NEP2-0948/CHAWOO
99001110072



Island Oak

LUX.SHS.NEP2-0948/ISLOAK
99001110073



Valley Oak

LUX.SHS.NEP2-0948/VALOAK
99001110077



Squamish Oak

LUX.SHS.NEP2-0948/SQUOAK
99001110076






Rustic Pine

LUX.SHS.NEP2-0948/RUSPIN
99001110074



Winter Wheat

LUX.SHS.NEP2-0948/WINWHE
99001110078

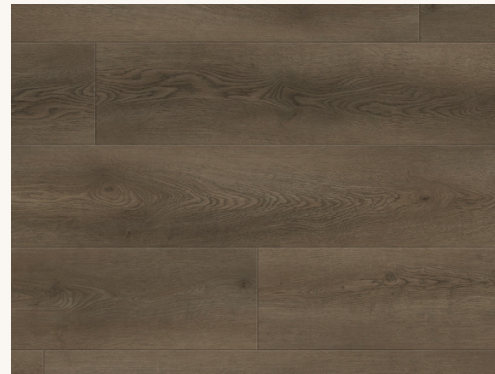

Rioja Oak

LUX.SHS.NEP2-0948/RIOOAK
99001110606



Savona Oak

LUX.SHS.NEP2-0948/SAVOAK
99001110607



Sonoma Oak

LUX.SHS.NEP2-0948/SONOAK
99001110608



Prairie Wheat Hickory

LUX.SHS.NEP2-0948/PWHHIC
99001110605

